

ATEX LED MAX

ES

Montaje: Adosado/Suspendido.

Fuente de luz: Módulos lineales LED SMD.

Temperatura de color 5000K.

Disponibles, 4000K.

Sistema óptico: Borosilicato templado.

Distribución luminosa: Directa.

Equipo eléctrico: Equipo de control electrónico. PF>0,95.

Materiales: Cuerpo: Fundición de aluminio. Difusor: Vidrio de Borosilicato templado. Incluidos: Prensa ATEX: M25 para cable no armado. Tapón ATEX antideflagrante M25.

Acabado: Color negro.



EN

Mounting: Surface/Suspended.

Light source: LED linear modules SMD.

Temperature color 5000K.

Available, 4000K.

Optical system: Borosilicate glass.

Light distribution: Direct.


Electrical equipment: Electronic control gear. PF>0,95.

Materials: Body: Foundry aluminum. Diffuser: Tempered borosilicate glass. included: ATEX non armored cable gland M25. ATEX Plug M25.


Surface finish: Black color.




ATEX LED MAX 190W
EXTENSIVO
ESTANDAR | STANDARD




ATEX LED MAX 190W
ASYMM




ATEX LED MAX 190W
65°



CERTIFICADO ATEX/ATEX CERTIFICATE

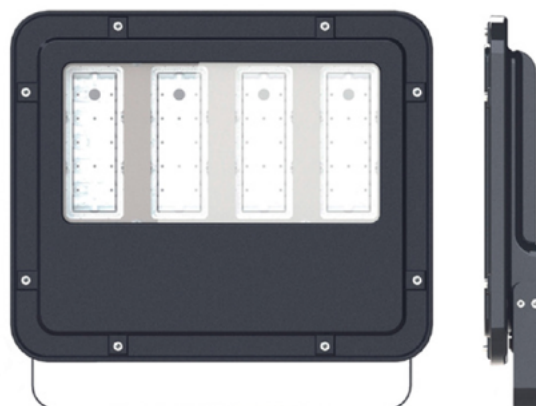

ZONAS	ZONA 2, 21, 22.	—
Protección contra explosiones de gas Gas explosion protection	ATEX: II 3G Ex ec IIC T4 Gc (todas las versiones/all versions) ATEX: II 3G Ex ec IIC T5 Gc (hasta 98W/up to 98W)	IECEX: Ex ec IIC T4 Gc (todas las versiones/all versions) IECEX: Ex ec IIC T5 Gc (hasta 98W/up to 98W)
Protección contra explosiones de polvo Dust explosion protection	ATEX: II 2D Ex tb IIIC 85°C Db	IECEX: Ex tb IIIC 85°C Db

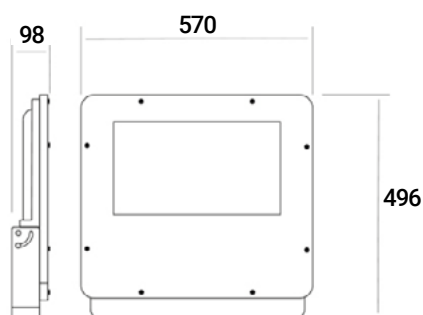

ESTANDAR/STANDARD



5 AÑOS
5 YEARS



220-240V
50-60Hz



IP 66



IK 08



CLASE I
CLASS I



100.000h
L80B10



-20°
+45°



CRI 80



ATEX
IECEX



TAPON
PLUG

DISPONIBLE/AVAILABLE



DALI



4000K



1h
3h

CONFIGURACION ONLINE ONLINE CONFIGURATION



Código Code	Referencia Reference	Potencia Power	Lúmenes Lumens	Eficiencia Efficiency	CCT (K) CCT (K)
AIRPA105A	ATEX LED MAX 50W 8164lm/5000K EXTENSIVO	50W	8164	163 lm/W	5000
AIRPA205A	ATEX LED MAX 98W 16368lm/5000K EXTENSIVO	98W	16368	167 lm/W	5000
AIRPA305A	ATEX LED MAX 148W 24552lm/5000K EXTENSIVO	148W	24552	166 lm/W	5000
AIRPA405A	ATEX LED MAX 190W 32726lm/5000K EXTENSIVO	190W	32726	172 lm/W	5000

ACCESORIOS DISPONIBLES/AVAILABLE ACCESSORIES

T.COLOR 4000K SET DE SUSPENSION DE CABLE DE ACERO INOX/STAINLESS STEEL SUSPENSION CABLE PRENSAESTOPA CABLE ARMADO/ ARMORED CABLE GLAND
PROTECCION MARINA/MARINE ENVIRONMENT PROTECTION